



Art.-No.: 777WF66 • Status: 07/2010 • Subject to technical alterations!





Enjoy living!



NEW!
The first resilient flooring
for glueless installation!

ENJOY THE BEAUTIFUL WORLD OF LIVING WITH
INNOVATIVE FLOORING FROM WINDMÖLLER FLOORING!

QUIET

– pleasing acoustics thanks to the elastic surface

WETROOM SUITABLE

– perfect flooring solution
either for kitchen or bathrooms

WARM & ANKLE PROTECTING

– thanks to the elastic surface

THIN PRODUCT CONSTRUCTION

– brilliant suitability for renovation thanks to
low product thickness of only 5 mm

EASY & FAST INSTALLATION

– thanks to the glueless Connect system

HIGH WEAR RESISTANCE

– thanks to structured surface even perfectly
applicable for dogs & cats

DESIGNline®
C O N N E C T
Laguna




MODERN LIVING

● Alba Oak Snow – CEI2336LA – 1 strip

● Alba Oak Cream – CEI2332LA – 1 strip



MODERN LIVING

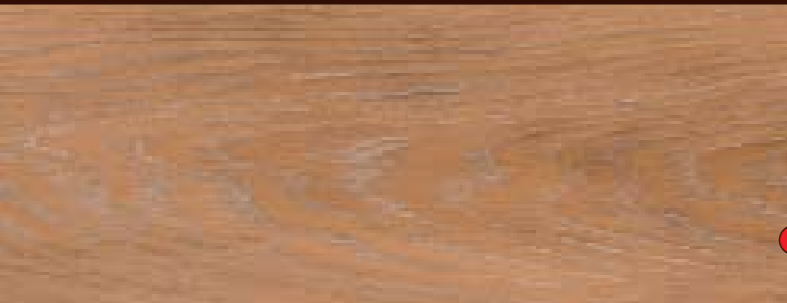

● Alba Oak Cottage – CEI2337LA – 1 strip



● Alba Oak Siena – CEI2333LA – 1 strip



CLASSIC ELEGANCE



▲ Everglade Oak – CEI3377LA – 1 strip



● Victoria Maple – CAH2131LA – 1 strip



EXOTIC FASHION STYLE

□ Hamilton Beech – CBU2431LA – 2 strips

● Boston Cherry – CKB1472LA – 1 strip



EXOTIC FASHION STYLE

● Mexican Walnut – CNU2424LA – 2 strips

● Dark Oak – CEI3332LA – 1 strip



FASHION TREND STYLE

● Dark Pine – CKI6203LA – 1 strip

▲ Black Oak – CEI2441LA – 2 strips



TECHNICAL DATA

Covering type according to EN 649: Heterogeneous resilient-flooring (PVC)

THICKNESS:	5 mm
WEIGHT PER SQM:	approx. 8 kg/m ²
WEAR LAYER:	0,3 mm
PU COATED:	yes
BEVELLED EDGE:	yes
SURFACE:	Fine Touch <input type="checkbox"/> Natural Touch <input checked="" type="checkbox"/> Real Touch <input checked="" type="checkbox"/>
UTILIZATION CLASS:	23/31 Heavy private use / light commercial use
PLANK SIZE:	1212 x 185 mm
PACKAGING	
BOX:	1,79 m ² (8 planks)
PALET:	114,75 m ² (64 boxes)
RESIDUAL INDENTATION:	0,07 mm / EN 433
DIMENSION STABILITY:	0,05% lateral
ANTI SLIP CATEGORY:	R9 / DIN 51130
SLIP RESISTANCE:	cat. DS as per EN 14041
FIRE BEHAVIOUR:	C _{fl} - S1 (ÖTI) ≈ B1 / EN 13501-1
LIGHTFAST:	≥ 6 / ISO 105-Bo2
UNDERFLOOR HEATING:	Suitable for all standard warm-water heating systems
HEAT TRANSMISSION RESISTANCE:	0,033 m ² K/W
CASTOR WHEEL TRAFFIC:	Suitable according to EN 425, classif. W
FOOTFALL SOUND ABSORPTION:	approx. 7 dB / EN 140-8; approx. 11 dB / EN 140-8 in combination with ComfortTEC
CHEMICAL RESISTANCE:	Resistant as per EN 423
WEAR BEHAVIOUR:	Group T as per EN 660 part 1
GARANTEE:	20 years for private application



PU coated

Bevelled edge

- Fine Touch:**
Light wood grain
- Natural Touch:**
Wood structure
- Real Touch:**
Rough wood structure

CE
ISO 14001

GARANTIE
GUARANTEE
20
JAHRE/YEARS
PRIVATER EINSATZ
PRIVATE APPLICATION



THE PERFECT UNDERLAYMENT FOR DESIGNLINE CONNECT

The ComfortTEC anti-slip and acoustic mat is a underlayment material designed specially for application under DESIGNline Connect.

TECHNICAL DATA

COMPOSITION COMFORTTEC:	Permanent resilient underlayment including mineral fillers and Polyurethan binder
THICKNESS:	approx. 1,5 mm (+/- 0,1 mm)
ROLL FORMAT:	approx. 10 m x 1 m 10 m ² per roll
WEIGHT PER SQM:	1,5 kg/m ² 15 kg per roll
FIRE BEHAVIOUR:	B _{fl} - S1 as per EN 13501-1
FOOTFALL SOUND ABSORPTION:	approx. 11 db / EN 140-8 (test incl. DESIGNline Connect)
UNDERFLOOR HEATING:	Suitable for all standard warm-water heating systems
PROTECTION FILM:	PET-film – Remove protection film before installation of DESIGNline Connect!
WASTE DISPOSAL CODE:	EAK-No. 170604 – through household waste

07/2010: SUBJECT TO TECHNICAL ALTERATIONS!

APPLICATION

- Adjustment of underfloor unevenness, e.g. in case of installation on ceramic tiles, wood floorings etc.
- In order to increase the anti-slip behaviour for promotion spaces, e.g. shop-in-shop application or special-sale spaces
- Optimization of footfall – and walking noise reduction
- Improvement of installation comfort

Please regard the installation manual of ComfortTEC!

